ICETRO BY TAYLOR®

Item No. _____

ISI-161TH

Soft Serve Freezer



Single Flavor

Icetro by Taylor compact Single Flavor, Gravity Fed, Hopper Agitator, Heat Treatment.

Features

Offer all the popular soft serve variations, from low-fat to non-fat ice creams or yogurt.

Heat Treatment System

Provides a daily heating and cooling cycle to safely maintain dairy products up to 28 days before a complete disassembly and cleaning is required.

Freezing Cylinder

One, 1.5 quart (1.4 liter).

Mix Hopper

One, 3.2-quart (3-liter) separate hopper refrigeration (SHR) maintains the mix below 41°F (5°C) in both Auto and Standby modes.

Indicator Lights

The Mix Low and Mix Out indicators alert the operator to add more mix. An audible alarm can be activated to sound when the mix is running low. If the Mix Out indicator is illuminated, the unit will automatically shut down to prevent any damage.

Electronic Controls

Microprocessor touch controls are integrated. Temperatures in the hopper and freezing cylinder are displayed at any point during operation. The microprocessor maintains a creamy consistency without dispensing soft serve for up to two hours.

Standby

During long no-use periods, the Standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.

ISI-161TH I16112D717


Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
info@taylor-company.com

ISO 9001:2015
Registered Firm

CLASSIFIED UL EPH
DISPENSING FREEZER
NSF/ANSI 6
<SA46380>

C ETL US LISTED
Intertek
2002774

CONFORMS TO
UL STD.621
CERTIFIED TO CSA
STD.C22.2 #120

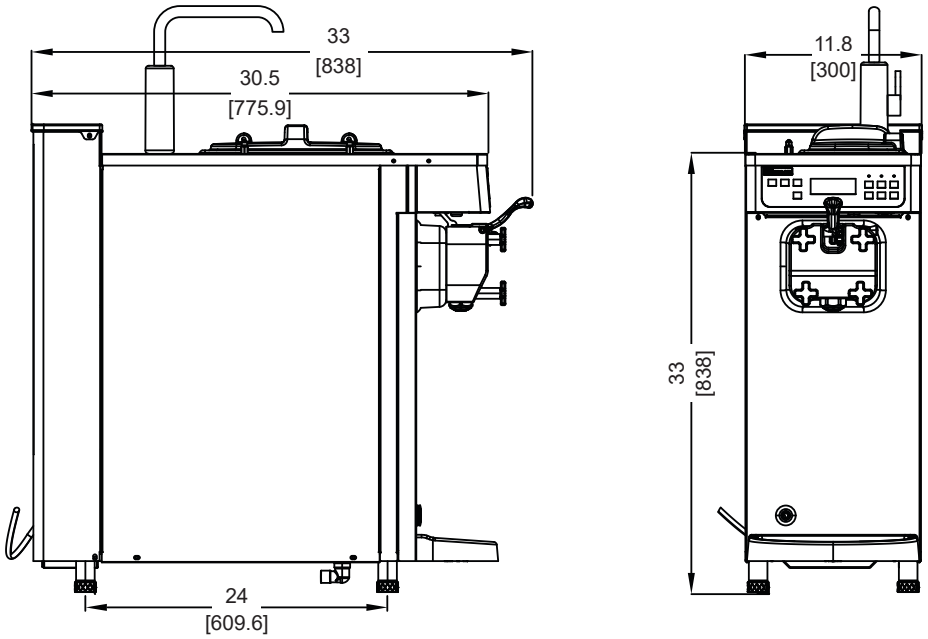

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO (PLUS OR MINUS 1/16 INCH [1.5mm]).

Weights	lbs.	kgs.
Net	196	89
Crated	238	108

**For reference only.*

	cu. ft.	cu. m.
Volume	18.53	0.52

Dimensions	in.	mm.
Width	11.8	300
Depth	30.5	775.9
Height	33	838

**Designed to rest on a plastic pad directly on counter top.*

Electrical	Total Ampacity	Supplied NEMA Cord
115/60/1	13.2	NEMA 5-20p

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.
(For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____

Neutral: ☐Yes ☐No **Cooling**: ☐Air ☐Water ☐NA

Options:_____

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor Distributor.

Specifications

Electrical
One dedicated electrical connection is required. Refer to the electrical chart for the proper electrical requirements. It is designed to be connected using a cord and plug.

Beater Motor
One, 0.5 HP.

Refrigeration System
Main system, one 2,163 BTU/Hr using R404A. The main system covers Separate Hopper Refrigeration. (BTUs may vary based on application.)

Air Cooled
Minimum 7.9 in. (200 mm) on the left side, and 19.7 (500 mm) on the right and rear sides to prevent recirculation of warm air. Minimum air clearances must be met to ensure adequate airflow for optimum performance.

Accessories
Top-Mounted Cleaning water faucet with bottom Water Inlet.

Authorized Taylor Distributor

ROCKY MOUNTAINS DISTRIBUTING

2580 S Tejon St, Englewood, CO 80110
303-825-0171
RMDColorado.com

TAYLOR®
750 N. Blackhawk Blvd.
Rockton, Illinois 61072
www.taylor-company.com