ICETRO BY TAYLOR®

Item No. _____

ISI-163TT

Soft Serve Freezer

Two Flavor Twin Twist

Icetro by Taylor compact Twin Twist, Gravity Fed, Hopper Agitator.





Optional Cart Available

Features

Offer all the popular soft serve variations from low-to non-fat ice creams or yogurt.

Freezing Cylinder

Two, 1.7 quart (1.6 liter).

Mix Hopper

Two, 5.9 quart (5 liter). Separate hopper refrigeration (SHR) maintains mix below 41ºF (5ºC) in Auto and Standby modes.

Indicator Lights

The Mix Low and Mix Out light alerts the operator to add mix. An audible alarm may be enabled to sound when mix is low. When the Mix Out light is on, the unit shuts down automatically to prevent damage.

Electronic Controls

Microprocessor touch controls are embedded. Temperatures in the hopper or freezing cylinder are displayed at any point of operation. Finished product quality is monitored by the microprocessor that measure viscosity.

Standby

During long no-use periods, the Standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.


Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
info@taylor-company.com

ISO 9001:2015
Registered Firm

C ETL LISTED US Intertek 2002774

CONFORMS TO
UL STD.621
CERTIFIED TO CSA
STD.C22.2 #120

ETL SANITATION LISTED Intertek

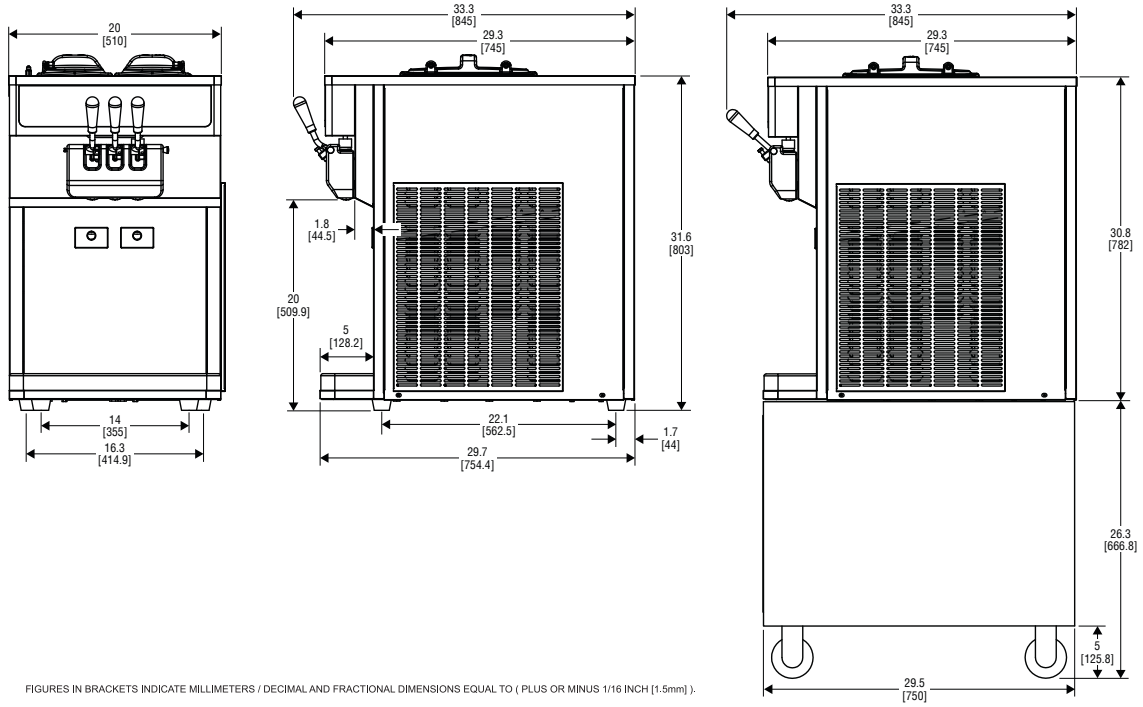

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO (PLUS OR MINUS 1/16 INCH [1.5mm]).

Weights	lbs.	kgs.
Net	395	179
Crated	430	195

**For reference only.*

	cu. ft.	cu. m.
Volume	29.14	0.82

Dimensions	in.	mm.
Width	20	510
Depth	29.3	745
Height	31.6	803

**Designed to rest on a plastic pad directly on counter top or optional cart.*

Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Total Ampacity	Poles (P) Wires (W)
208-230/60/1 Air	28	23	22	2P 3W

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.
(For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____

Neutral: ☐Yes ☐No **Cooling**: ☐Air ☐Water ☐NA

Options:_____

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor Distributor.

Specifications

Electrical
One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult the Taylor distributor for cord and receptacle specifications.

Beater Motor
Two, 0.5 HP.

Refrigeration System
Main system, two, 2,163 BTU/Hr using R404A. Separate Hopper Refrigeration (SHR), one, 891 BTU/Hr R134a. (BTUs may vary based on application.)

BTU/hr
2,163 BTU/Hr using R404A, 891 BTU/Hr using R134a.

Air Cooled
Minimum 11.8 in. (300 mm) on the left, right, and rear sides to prevent recirculation of warm air. Minimum air clearances must be met to ensure adequate airflow for optimum performance.

Options Available, Ordered Separately
- C211 Cart for Model ISI-163TT

Authorized Taylor Distributor

ROCKY MOUNTAINS DISTRIBUTING
2580 S Tejon St, Englewood, CO 80110
303-825-0171
RMDColorado.com

TAYLOR®
750 N. Blackhawk Blvd.
Rockton, Illinois 61072
www.taylor-company.com