ICETRO BY TAYLOR®

Item No. _____

ISI-271SHSN

Soft Serve Freezer



Single Flavor

Icetro by Taylor Semi Automatic Vending Slim Single Flavor, Gravity Fed, Hopper Agitator.

Features

Offer all the popular soft serve variations from low-to non-fat ice creams or yogurt.

Freezing Cylinder

One, 2.9 quart (2.7 liter).

Mix Hopper

One, 13.3 quart (12.3 liter), Separate hopper refrigeration (SHR) maintains mix below 41ºF (5ºC) in Auto and Standby modes.

Indicator Lights

The Mix Low and Mix Out light alerts the operator to add mix. An audible alarm may be enabled to sound when mix is low. When the Mix Out light is on, the unit shuts down automatically to prevent damage.

Electronic Controls

Microprocessor touch controls are embedded. Temperatures in the hopper or freezing cylinder are displayed at any point of operation. The microprocessor maintains a creamy consistency without dispensing soft serve for up to two hours.

Standby

During long no-use periods, the Standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.

Two Locking Casters

Front casters have a locking feature for operators to keep equipment in place. The lock can be released to move the equipment for cleaning.


ISI-271SHSN I27127D718


Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
info@taylor-company.com

ISO 9001:2015
Registered Firm

C ETL LISTED US Intertek 2002774
CONFORMS TO UL STD.621
CERTIFIED TO CSA STD.C22.2 #120

ETL SANITATION LISTED Intertek

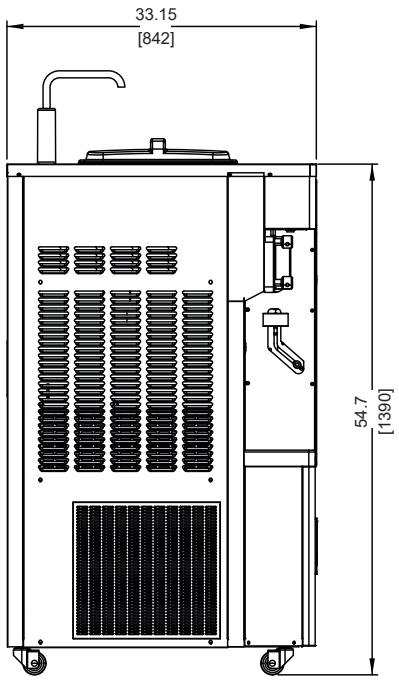

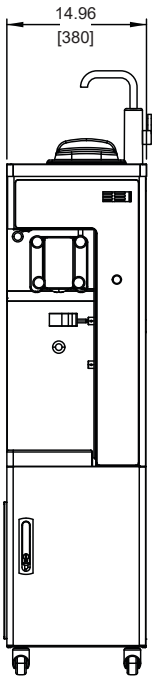

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO (PLUS OR MINUS 1/16 INCH [1.5mm]).

Weights	lbs.	kgs.
Net	313	141
Crated	369	167

**For reference only.*

	cu. ft.	cu. m.
Volume	42.38	1.20

Dimensions	in.	mm.
Width	14.96	380
Depth	33.15	842
Height	54.7	1390

**Mounted on standard casters.*

Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Total Ampacity	Poles (P) Wires (W)
208-230/60/1 Air	20	15	14	2P 3W

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.
(For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____

Neutral: ☐Yes ☐No **Cooling**: ☐Air ☐Water ☐NA

Options:_____

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor Distributor.

Specifications

Electrical
One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult the Taylor distributor for cord and receptacle specifications.

Beater Motor
One, 1.0 HP.

Refrigeration System
Main system, one, 3,818 BTU/Hr using R404A. The main system covers Separate Hopper Refrigeration. (BTUs may vary based on application.)

BTU/hr
3,818 BTU/Hr using R404A.

Air Cooled
Minimum 7.9 in. (200 mm) on the left, right, and rear sides to prevent recirculation of warm air. Minimum air clearances must be met to ensure adequate airflow for optimum performance.

Accessories
Top-Mounted Cleaning water faucet with bottom Water Inlet.

Authorized Taylor Distributor

ROCKY MOUNTAINS DISTRIBUTING
2580 S Tejon St, Englewood, CO 80110
303-825-0171
RMDColorado.com

TAYLOR®
750 N. Blackhawk Blvd.
Rockton, Illinois 61072
www.taylor-company.com