ICETRO BY TAYLOR®

Item No. _____

ISI-303SNA

Soft Serve Freezer



Two Flavor Twin Twist

Icetro by Taylor Twin Twist, Gravity Fed, Hopper Agitator.

Features

Offer all the popular soft serve variations from low-to non-fat ice creams or yogurt.

Freezing Cylinder

Two, 3.6 quart (3.4 liter).

Mix Hopper

Two, 19 quart (18 liter), Separate hopper refrigeration (SHR) maintains mix below 41ºF (5ºC) in Auto and Standby modes.

Indicator Lights

The Mix Low and Mix Out light alerts the operator to add mix. An audible alarm may be enabled to sound when mix is low. When the Mix Out light is on, the unit shuts down automatically to prevent damage.

Electronic Controls

Microprocessor touch controls are embedded. Temperatures in the hopper or freezing cylinder are displayed at any point of operation. Finished product quality is monitored by the microprocessor that measure viscosity.

Standby

During long no-use periods, the Standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.

Two Locking Casters

Front casters have a locking feature for operators to keep equipment in place. The lock can be released to move the equipment for cleaning.


Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
info@taylor-company.com

ISO 9001:2015
Registered Firm

C ETL LISTED US Intertek 2002774
CONFORMS TO UL STD.621
CERTIFIED TO CSA STD.C22.2 #120

ETL SANITATION LISTED Intertek

ISI-303SNA I30333D328

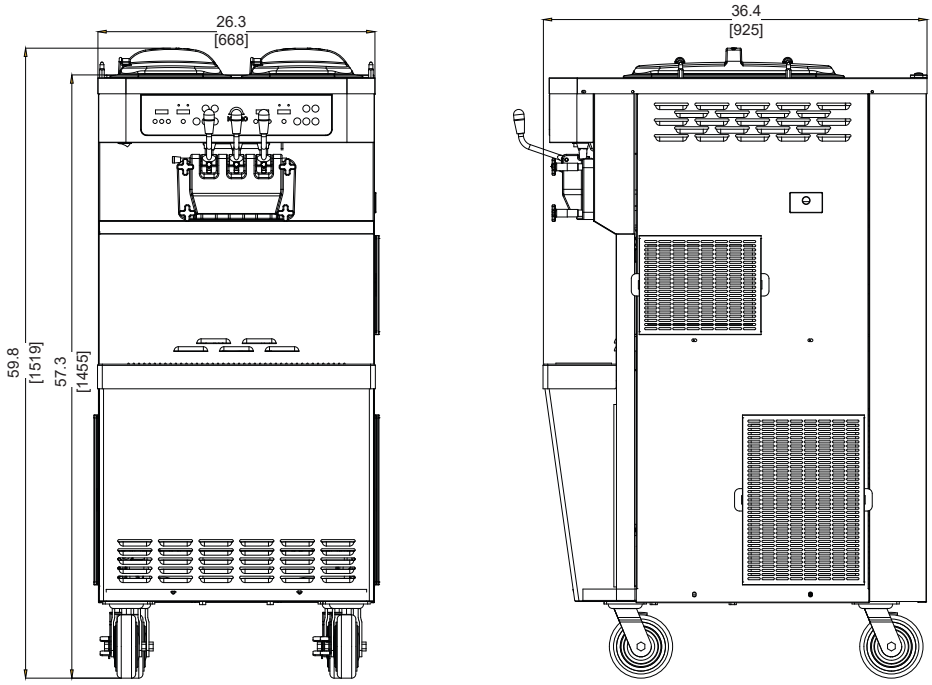

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO (PLUS OR MINUS 1/16 INCH [1.5mm]).

Weights	lbs.	kgs.
Net	765	347
Crated	841	381
**For reference only*		
	cu. ft.	**cu. m.**
Volume	89.33	2.53
Dimensions	**in.**	**mm.**
Width	26.3	668
Depth	36.4	925
Height	59.8	1519
**Mounted on standard casters*		

Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Total Ampacity	Poles (P) Wires (W)
208-230/60/3 Air	35	31	30	3P 4W

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.
(For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____

Neutral: ☐Yes ☐No **Cooling**: ☐Air ☐Water ☐NA

Options:_____

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor Distributor.

Specifications

Electrical
One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult the Taylor distributor for cord and receptacle specifications.

Beater Motor
Two, 1.0 HP.

Refrigeration System
Main system, two, 5,090 BTU/Hr using R404A. Separate Hopper Refrigeration (SHR), one, 891 BTU/Hr R134a. (BTUs may vary based on application.)

BTU/hr
5,090 BTU/Hr using R404A, 891 BTU/Hr using R134a.

Air Cooled
Minimum 7.9 in. (201 mm) on the left, right, and rear sides to prevent recirculation of warm air. Minimum air clearances must be met to ensure adequate airflow for optimum performance.

Authorized Taylor Distributor

ROCKY MOUNTAINS DISTRIBUTING

2580 S Tejon St, Englewood, CO 80110
303-825-0171
RMDColorado.com

TAYLOR®
750 N. Blackhawk Blvd.
Rockton, Illinois 61072
www.taylor-company.com