TAYLOR®

Item No. _____

342

Frozen Uncarbonated Beverage Freezer

Two Flavor



Features

Vary your menu by offering smoothies, frozen cocktails, fruit juices, coffees, cappuccino, and tea slush beverages, all served at the desired thickness.

Freezing Cylinder

Two, 7 quart (6.6 liter).

Mix Hopper

Two, 20 quart (18.9 liter). Optional refrigerated hopper approved for dairy products.

Indicator Light

Add Mix light alerts the operator to add mix.

Automatic Consistency Control

A specially designed viscosity control automatically maintains superior product quality. Adjustable control allows the operator to serve a wide variety of frozen beverages at the desired thickness.

Two Locking Casters

Front casters have a locking feature for operators to keep equipment in place. The lock can be released to move the equipment for cleaning.

Approval Mark Note:
The Approval marks shown below may not apply to every model configuration. Approvals may vary based on Voltage, Model Option and Accessory selection, please contact your local distributor for more information.


750 N. Blackhawk Blvd. Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
info@taylor-company.com

ISO 9001:2015
Registered Firm

NSF Standard 18

c UL us LISTED SA4632

CE Selected 50/60 Hz. Models

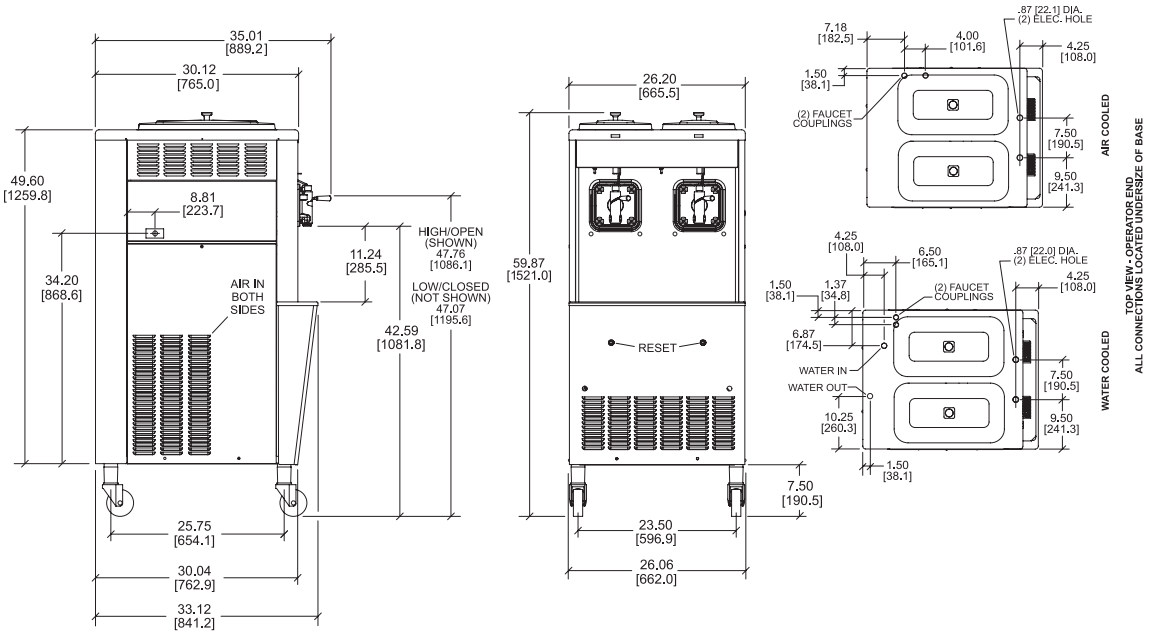

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO (PLUS OR MINUS 1/16 INCH (1.5mm)).

Weights	**lbs.**	**kgs.**
Net	519	235.4
Crated	593	268.9

**For reference only*

	cu. ft.	**cu. m**
Volume	48.9	1.38

Dimensions	**in.**	**mm.**
Width	26-1/4	665
Depth	33-1/8	842
Height	59-7/8	1521
Floor Clearance	7-1/2	190

**Mounted on standard casters*

Electrical	**Maximum Fuse Size**		**Minimum Circuit Ampacity**		**Poles (P) Wires (W)**
	Left	**Right**	**Left**	**Right**	
208-230/60/1 Air	20	15	14	11	2P 3W
208-230/60/1 Water	15	15	11	11	2P 3W
208-230/60/3 Air	15	15	10	7	3P 4W
220-240/50/1 Air	15	12	14	10	2P 3W
380-415/50/3N~ Air	8	6	8	5	4P 5W

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.
(For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz_____ ph _____

Neutral: ☐Yes ☐No **Cooling**: ☐Air ☐Water ☐NA

Options:

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor distributor.

Specifications

Electrical

Two dedicated electrical connections are required. See the electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord and receptacle specifications as local codes allow.

Beater Motor

Two, 1/4 hp.

Refrigeration System

Two, 7,500 BTU/hr. R449A.
(BTUs may vary depending on compressor used.)

Air-Cooled

Minimum 3" (76 mm) around all sides. Install the deflector provided to prevent recirculation of warm air. Minimum air clearances must be met to ensure adequate airflow for optimum performance.

Water-Cooled

Water inlet and drain connections underside of base 1/2" FPT.

Options

- Available as Model 342D, with Refrigerated Hopper, 1/2 hp Beater Motor, Beater Cycle Timer. Maintains mix below 41ºF (5ºC). Approved for dairy and non-dairy products.
- Remote Auto Fill System
- Syrup Jars and Brackets

Authorized Taylor Distributor

ROCKY MOUNTAINS DISTRIBUTING
2580 S Tejon St, Englewood, CO 80110
303-825-0171
RMDColorado.com

TAYLOR®
750 N. Blackhawk Blvd.
Rockton, Illinois 61072
www.taylor-company.com