TAYLOR®

Item No. _____

C302

Frozen Carbonated Beverage Freezer

Four Flavor



Consult Taylor distributor for merchandising options.



Shown with Optional Syrup Storage Cart

Features

Dispense a light, fluffy, high overrun slush product in a pressurized system from this modular, counter-top freezer. Air is discharged out the top of the unit to accommodate tight counter space. Optional cart converts the unit to a self-contained floor model, and provides storage for the syrup.

Freezing Cylinder
Four, 7 quart (6.6 liter).

Dispensing Door
Clear plastic dispensing doors allow customers to see slush being made. Self closing draw handles are standard. Round dispensing nozzle conveniently fits the hole in domed lids. Push style dispensing handle provides for 2010 Americans with Disabilities Act (ADA) compliant dispensing height.

Indicator Lights/Audible Alarm
Lights illuminate and audible alarm sounds to indicate loss of CO_2, water or syrup on the affected freezing cylinder. The other flavors will continue to operate when one loses syrup. A snooze feature may be activated to silence the alarm for 30 minutes.

Automatic Defrost
Programmable defrost cycles allow the operator to select the time and frequency for defrosting each freezing cylinder independently. The defrost light flashes to warn customers not to draw product from the side that is being defrosted. At the end of the defrost cycle, the freezing cylinder automatically returns to the freeze-down mode.

Power Saver
During extended no-use periods, the Power Saver feature may be programmed for either Standby or Rest Mode. Standby Mode maintains product in freezing cylinder between 35 & 40°F (1.6 & 4.4°C) for quickest return to serving product. Rest Mode shuts down the refrigeration system for the most energy savings. Start and end times may be programmed independently for seven cycles.

Sure Set™ Flow Control
Automatically maintains brix settings by compensating for fluctuations in water, CO^2, and syrup pressures. Water flow is preset at the factory.

Electronic Viscosity Control
Slushtech™ is standard with our exclusive microprocessor based universal control which regulates refrigeration by measuring product viscosity.

Air Filter
Removable, cleanable air filter helps keep condenser clean for optimal refrigeration system performance.

Merchandising
LED display backlights translight and illuminates clear dispensing doors to draw customer attention. This display provides energy efficient, even, consistent lighting.

Approval Mark Note:
The Approval marks shown below may not apply to every model configuration. Approvals may vary based on Voltage, Model Option and Accessory selection, please contact your local distributor for more information.

750 N. Blackhawk Blvd. Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
info@taylor-company.com


ISO 9001:2015
Registered Firm

NSF Standard 18

c UL us LISTED SA4632

CE Selected 50/60 Hz. Models

Shown with Optional Standard Cart

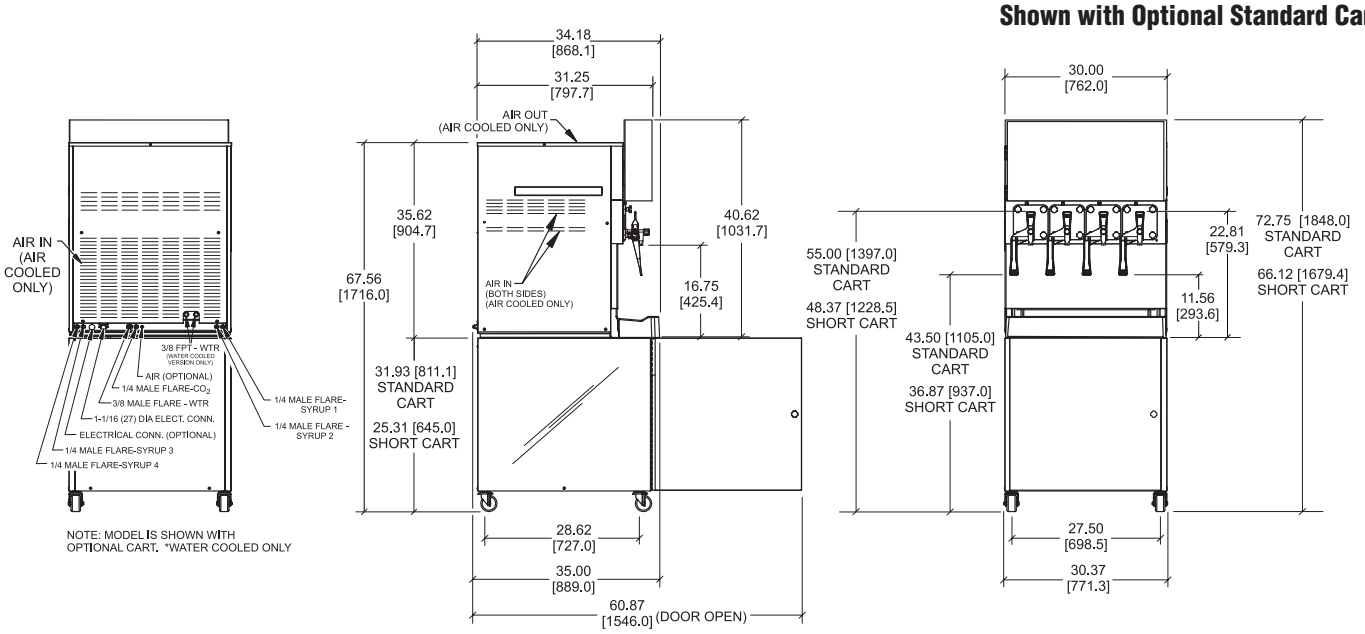

FIGURES IN BRACKETS INDICATE MILLIMETERS EQUIVALENT TO DECIMAL DIMENSIONS (PLUS OR MINUS 1/16 INCH [1.5mm]).

Weights	lbs.	kgs.
Net	675	306.2
Crated	702	318.4
**For reference only*		
	cu. ft.	**cu. m.**
Volume	42.1	1.19
Dimensions	**in.**	**mm.**
Width	30-3/8	771
Depth	35	889
Height	40-5/8	1032

**Designed to rest on a plastic pad directly on counter top or optional cart*

Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)
208-230/60/1 Air	45	35	2P 3W

This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor Distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.

(For exact electrical information and approval marks, always refer to the data label of the unit.)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____

Neutral: ☐Yes ☐No **Cooling**: ☐Air ☐Water ☐NA

Options:

Specifications

Electrical

One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord & receptacle specifications as local codes allow.

Beater Motor

Two, 1/4 HP.

Refrigeration System

Two, 17,000 BTU/hr compressor (nominal rating). R404A. (Actual BTUs will vary based on application.)

Carbonation System

Self-contained carbonation system. Syrup, CO_2(1/4" MFL) and water (3/8" MFL) fittings connect at the rear of the machine.

Potable Water Pressure

Minimum 25 PSI for proper operation of unit.

Air Cooled

Minimum Clearance: 3" (76 mm) around all sides, and 12" (305 mm) on the top of the unit. Minimum air clearances must be met to assure adequate air flow for optimum performance.

Options

- Short lighted display to match top of unit height
- Syrup Storage Cart: Includes shelves for storing BIB FCB syrups and mounting BIB pumps (not included).
- C203 Cart Standard Height with Casters
- C203 Cart Standard Height with Casters, with Pump

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor distributor.

Authorized Taylor Distributor

ROCKY MOUNTAINS DISTRIBUTING
2580 S Tejon St, Englewood, CO 80110
303-825-0171
RMDColorado.com

TAYLOR®
750 N. Blackhawk Blvd.
Rockton, Illinois 61072
www.taylor-company.com