TAYLOR®

Item No. _____

RD30

Frozen Uncarbonated Beverage (FUB) Dispenser

Single Flavor



Features

Serve non-dairy frozen beverages, like frozen lemonade, fruit drinks, exotic frozen cocktails and non-alcoholic drinks.

Requires separate remote refrigeration and mix supply systems for operation. The RC25 remote refrigeration system is recommended to be installed with the RD30 for efficient operation. (See RC25 specification for further details.) Mix is stored in a remote location or walk-in cooler and delivered to the dispenser automatically. Customized mix delivery systems are available based on volume needs for Bag-in-Box, other post-mix or pre-mix products.

Freezing Cylinder

One, 7 quart (6.6 liter).

Indicator Light

When the Mix Out light flashes, refrigeration shuts down automatically to prevent damage. Beater continues to operate, allowing the finished product to be dispensed until mix can be replenished.

Automatic Consistency Control

Refrigeration is regulated by monitoring viscosity. Adjustable control allows the operator to serve a wide variety of frozen beverages from regular slush to cocktails, pre-mix or neutral base, all at the desired thickness.

Continuous Auto Fill System

Mix supply to the dispenser is continuously replenished automatically.

NSF Standard 18 · c UL us LISTED SA4632 · CE Selected 50/60 Hz. Models

Approval Mark Note:
The Approval marks shown below may not apply to every model configuration. Approvals may vary based on Voltage, Model Option and Accessory selection, please contact your local distributor for more information.

Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
info@taylor-company.com

International Office
Taylor Company S.r.l.
Roma, Italy
Tel: +**39-06-420-12002** Fax: +39-06-420-12034
e-mail: romeoff@taylor-company.com

ISO 9001:2015
Registered Firm

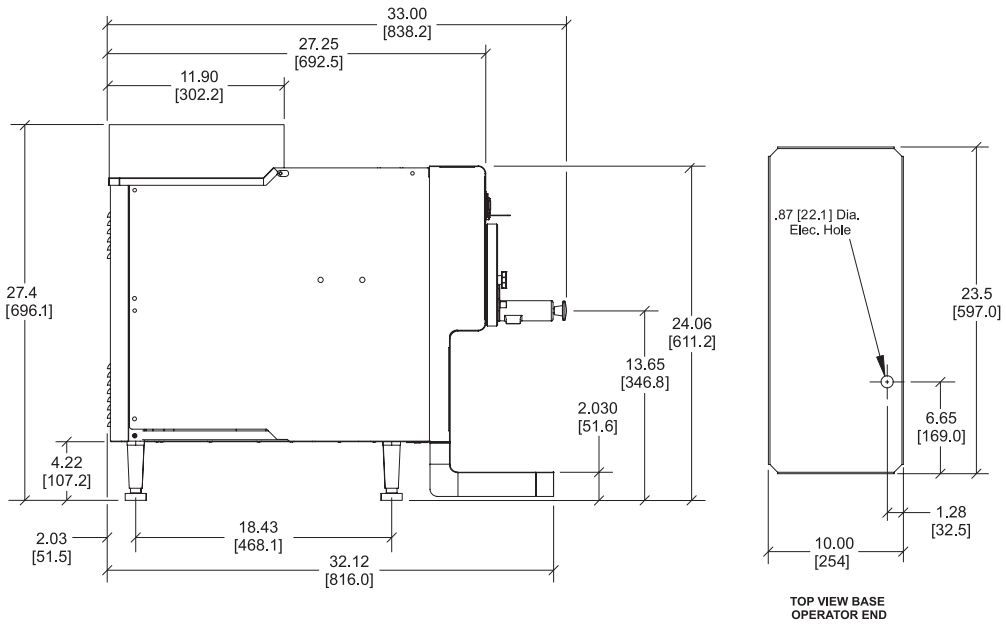

FIGURES IN BRACKETS INDICATE MILLIMETERS EQUIVALENT TO DECIMAL DIMENSIONS (PLUS OR MINUS 1/16 INCH [1.5mm]).

Weights	lbs.	kgs.
Net	135	61.2
Crated	175	79.4
	cu. ft.	**cu. m.**
Volume	10.8	.31
Dimensions	**in.**	**mm.**
Width	10	254
Depth	33	838
Height	27-13/32	696
Counter Clearance	4-1/4	108

**Mounted on standard legs.*

Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)
115/60/1	15	6	2P 3W

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.
(For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz_____ ph _____

Neutral: ☐Yes ☐No **Cooling**: ☐Air ☐Water ☐NA

Options:_____

Specifications

Electrical
One dedicated connection required. Manufactured to be permanently connected. See the Electrical chart for proper electrical specifications.

Beater Motor
One, 1/2 HP.

RC25 Refrigeration System
One, 16,500 BTU/hr compressor. R404A. (BTUs may vary depending on compressor used.) See RC25 Specification for further details.

For maximum capacity, connect one dispenser to each RC25. Two dispensers may be connected to one refrigeration system; capacity may be reduced. The maximum total length of refrigeration suction line is 150 feet (45.7 m).

Clearance
No air clearance is required.

Additional Requirements

- Customized Mix Delivery System
- Remote Refrigeration System (see Model RC25 specification)

Authorized Taylor Distributor

ROCKY MOUNTAINS DISTRIBUTING

2580 S Tejon St, Englewood, CO 80110
303-825-0171
RMDColorado.com

TAYLOR®

750 N. Blackhawk Blvd.
Rockton, Illinois 61072
www.taylor-company.com