TAYLOR®

Item No. _____

# L812

## Electric Two-Sided Grill





### Features

One touch menu selection automatically provides accurate TIME, TEMPERATURE, and GAP settings for every product.

### Programmable Controls

Microprocessor controls are programmable for simplified operator operation. Offers flexibility for future menu items and product specification changes at the restaurant level. Customizable to offer multi-stage settings per product, five languages (English, Spanish, French, Russian and Portuguese), standby alert to conserve energy, and four timers that can be used specifically for flat grill cooking.

### External USB Port

External USB port allows user access to upload new menu and promotional items. Menu changes can be sent electronically to other store locations saving time and eliminating operator error.

### Upper Platens

Two upper platens will close automatically to the preset gap setting with the touch of one button. Air cylinder system provides quiet, simple, trouble-free operation of the upper platen. As a safety feature, platen will automatically open at loss of power, or if an obstruction is detected.

### Precise Automatic Gapping

Solid platform with 3-point reference plane and fixed (home) reference point. Once programmed, the upper platen automatically achieves accurate and consistent gaps, every time. Precise, repeatable gapping assures product safety and better quality finished product.

### Cooking Zones

Three separately controlled cooking zones. Each zone has three independent heating elements, and two in the upper platen to assure even temperatures and quick recovery.

### Side-To-Side Release Material

Protects entire upper platen cooking surface and makes cleaning easy. Improved installation and removal process away from hot surfaces.

### Patty Cook Position Placement Guide

Lower cooking surface is etched for a permanent patty placement guide for two-sided cooking.

### Optional Weighted Platens- 3 Phase Models Only

The weighted platen is designed to compress a fresh hand formed product to a patty, while maintaining the juices and quality of the product along with the desired sear.

**Approval Mark Note:**
The Approval marks shown below may not apply to every model configuration. Approvals may vary based on Voltage, Model Option and Accessory selection, please contact your local distributor for more information.

750 N. Blackhawk Blvd. Rockton, Illinois 61072
**800-255-0626**
Phone 815-624-8333 Fax 815-624-8000
**www.taylor-company.com**
info@taylor-company.com

ISO 9001:2015
Registered Firm

NSF Standard 4


c UL us LISTED E84050

CE Selected 50 Hz. Models

ENERGY STAR

ENERGY STAR QUALIFIED WITH 208V OR 240V, 60HZ SPECIFICATIONS

L812

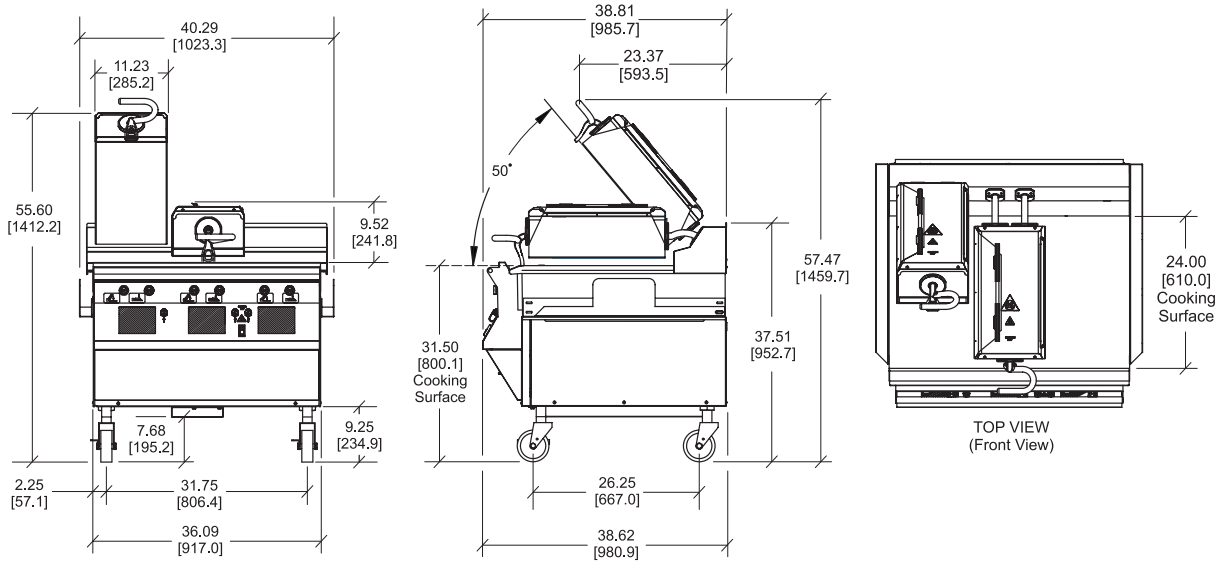


FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO ( PLUS OR MINUS 1/16 INCH [1.5mm] ).
**MACHINE HEIGHT CAN VARY ( PLUS OR MINUS 2.5 INCHES [63.5 MM] ) WITH CASTER HEIGHT ADJUSTMENT** / SIDE GREASE CANS NOT SHOWN.

| **Weights** | **lbs.** | **kgs.** |
|---|---|---|
| Net | 773 | 350.6 |
| Crated | 947 | 430.0 |
| | **cu. ft.** | **cu. m.** |
| Volume | 53.7 | 1.52 |
| **Dimensions** | **in.** | **mm.** |
| Width | 40-5/16 | 1024 |
| Depth | 38-13/16 | 986 |
| Height | 55 to 60 | 1397 to 1524 |
| Cooking Surface Height | 29 to 34 | 737 to 864 |
| Floor Clearance | 5-3/16 to 10-3/16 | 132 to 259 |

**Casters may be adjusted.**

| **Electrical** | **Amps Per Cord** | **Total kW** | **Cord Supplied with NEMA Plug** |
|---|---|---|---|
| *208/60/3 | 38 (2) | 23 | NEMA L15-50P (2) |
| 400/50/3N~ | 18 (2) | 20 | ** |

**** Plug supplied by customer**
*** ENERGY STAR qualified model**

# Specifications

## Electrical

Two dedicated electrical connections are required. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for receptacle specifications as local codes allow. Restraining cable included.

# Accessories

- Cleaner (1qt.)
- Grease cans (two, mount on each side)
  **Minimum clearance from construction:**
  Allow for a 34**"** (86.4cm) minimum aisle width in front of grill for grease can removal.
- Release sheets; includes clips and retainer (one box of 9)
- Squeegee (one)

# Options

- Cleaning Pads (10 qty.)
- Cleaning Pad Holder
- Gap Gage (0.255)
- Grill Scraper
- Tool Holder
- Weighted Platens

This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor Distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.
**(For exact electrical information and approval marks, always refer to the data label of the unit.)**

**Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.**

**Bidding Specs**

**Electrical**: Volt _____ Hz_____ ph _____

Neutral: ☐Yes ☐No **Cooling**: ☐Air ☐Water ☐NA

**Options**:_____


**Authorized Taylor Distributor**

ROCKY MOUNTAINS DISTRIBUTING

2580 S Tejon St, Englewood, CO 80110
303-825-0171
RMDColorado.com

TAYLOR®

750 N. Blackhawk Blvd.
Rockton, Illinois 61072
**www.taylor-company.com**