
TAYLOR®

Item No. _____

C161

Soft Serve Freezer

Compact Twin Twist

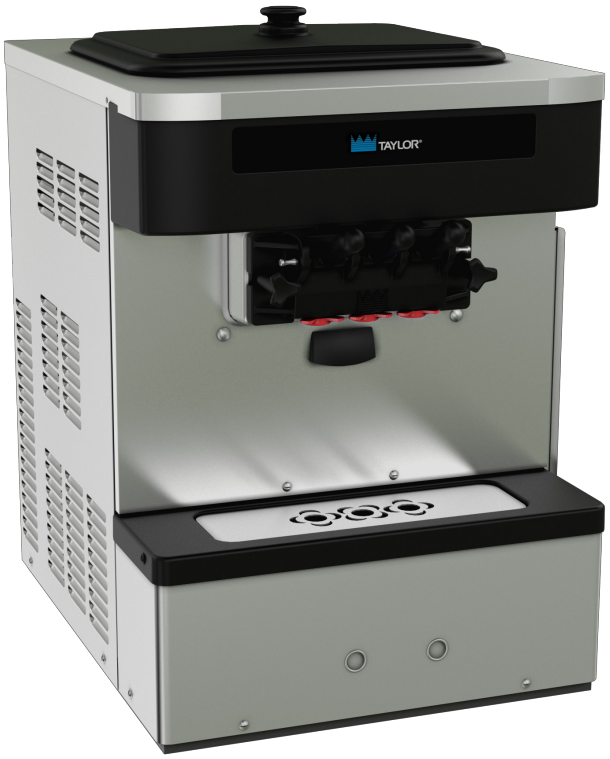

Features
Offer all the popular soft serve variations, from low or non-fat ice creams to custard, yogurt, and sorbet. Serve two separate soft serve flavors or an equal combination of both in a twist.

Freezing Cylinder
Two, 1.5 quart (1.4 liter).

Mix Hopper
Two, 8 quart (7.6 liter). Separate hopper refrigeration (SHR) maintains mix below 41ºF (5ºC) in Auto and Standby modes.

Indicator Lights
The Mix Low light alerts the operator to add mix. Audible alarm may be enabled to sound when mix is low.

Electronic Controls
Finished product quality is monitored by Softech™ controls that measure viscosity.

Standby
During long no-use periods, the Standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.

Air Filter
Easily removable, cleanable air filter helps keep condenser clean for optimal refrigeration system performance.

Door Interlock System
Protects the operator from injury as the beater will not operate without the dispensing door in place.



Optional Cart with Front Opening Door


750 N. Blackhawk Blvd. Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
info@taylor-company.com

ISO 9001:2015
Registered Firm

NSF Standard 6

CE Selected 50/60 Hz. Models

c UL us LISTED SA2650

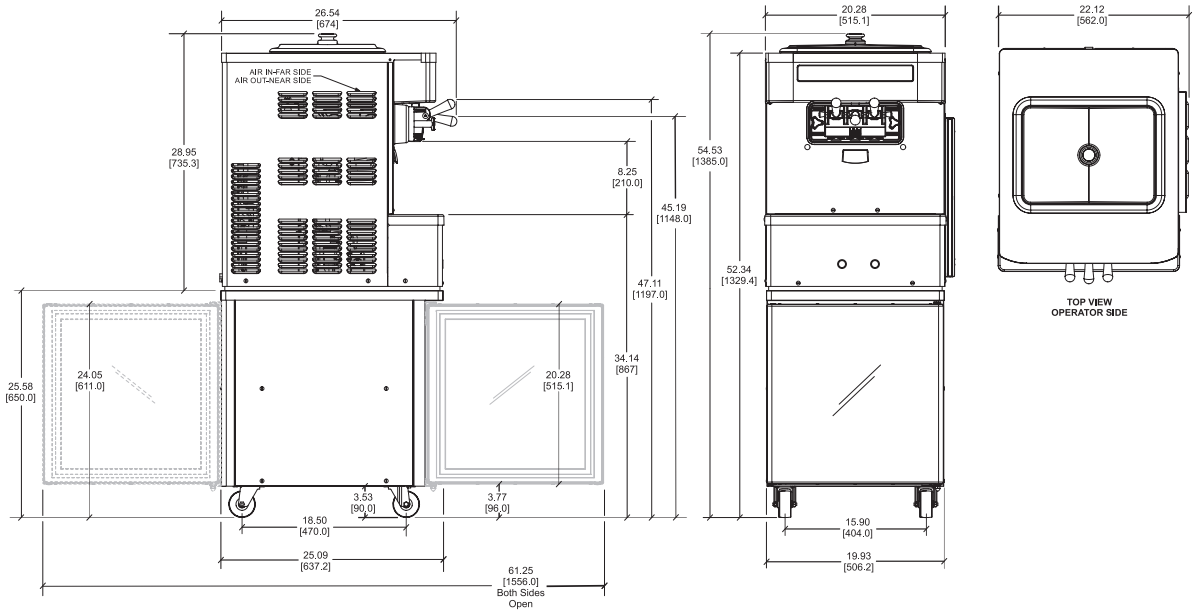

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO (PLUS OR MINUS 1/16 INCH [1.5mm]).
DRAWING IS TO BE USED FOR REFERENCE ONLY - DO NOT USE FOR STORE CONSTRUCTION LAYOUT.

Weights	**lbs.**	**kgs.**
Net	305	138.3
Crated	350	158.8
**For reference only*		
	cu. ft.	**cu. m.**
Volume	22.3	0.63
Dimensions	**in.**	**mm.**
Width	22-1/8	562
Depth	25-1/8	638
Height	29	737
**Mounted on standard casters*		

Electrical	**Total Amps**	**Poles(P) Wires(W)**
208-230/60/1 Air	12	6-15P
220-240/50/1 Air	10	----
208-230/60/1 Water	12	6-15P

Specifications

Electrical

One dedicated electrical connection is required. See the electrical chart for the proper electrical requirements. Manufactured to be cord-connected. Consult the international Taylor distributor for cord and receptacle specifications for 50 Hz equipment.

Beater Motor

Two, 0.5 HP.

Refrigeration System

One, 3,500 BTU/hr compressor (nominal rating). R449A.
Separate Hopper Refrigeration (SHR), one, 400 BTU/hr. R134a.
(Actual BTUs will vary based on application.)

Air-Cooled

Minimum Clearance: 6” (152 mm) on left and right, and 0” in the rear. Minimum air clearances must be met to ensure adequate airflow for optimum performance.

Options

- Cone Dispenser
- Legs - [increase height of unit by 4-1/4” (108 mm)]
- C207 Cart Standard Height with Casters

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements. **(For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)**

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz_____ ph _____

Neutral: ☐Yes ☐No **Cooling**: ☐Air ☐Water ☐NA

Options:_____

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor distributor.

Authorized Taylor Distributor

ROCKY MOUNTAINS DISTRIBUTING

2580 S Tejon St, Englewood, CO 80110
303-825-0171
RMDColorado.com

TAYLOR®

750 N. Blackhawk Blvd.
Rockton, Illinois 61072
www.taylor-company.com