TAYLOR®

Item No. _____

C709

Soft Serve Freezer

Single Flavor, Heat Treatment



Features

Offer all the popular soft serve variations, from low- to non-fat ice creams or yogurt.

Heat Treatment System

Provides a daily heating and cooling cycle to safely maintain dairy products up to 28 days before a complete disassembly and cleaning is required.

Freezing Cylinder

One, 3.4 quart (3.2 liter).

Mix Hopper

One, 20 quart (18.9 liter). Refrigerated to maintain mix below 41ºF (5ºC) in Auto and Standby modes.

Indicator Lights

Mix Low light alerts the operator to add mix. When the Mix Out light flashes, the unit automatically goes into Standby mode to prevent damage.

Touch Screen Controls

Microprocessor touch controls are embedded in a durable tempered glass panel. Multiple languages are selectable. Viscosity is continually measured to dispense soft serve desserts. Soft lockout features improve reliability. Temperatures in the hopper or freezing cylinder may be displayed at any point of operation. History of temperatures and times during the last 366 heat cycles may be viewed from the fluorescent display.

Standby

During long no-use periods, the Standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.

Door Interlock System

Protects the operator from injury as the beater will not operate without the dispensing door in place.



Optional cart with front opening door



Optional cart with rear door for front mount syrup rail



Optional top air discharge chute

Approval Mark Note:
The Approval marks shown below may not apply to every model configuration. Approvals may vary based on Voltage, Model Option and Accessory selection, please contact your local distributor for more information.

750 N. Blackhawk Blvd. Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
info@taylor-company.com


ISO 9001:2015
Registered Firm

NSF Standard 6

c UL us LISTED SA2650

CE Selected 50/60 Hz. Models

Shown with Optional Air Discharge Chute and Cart

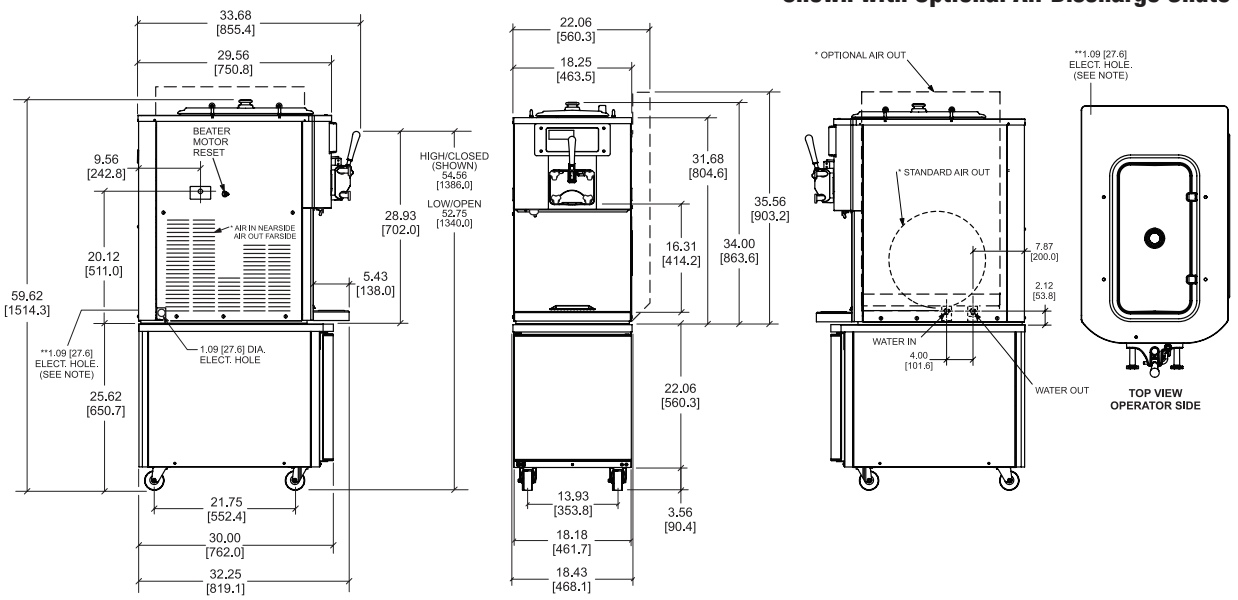

NOTE: * AIR COOLED ONLY / **1.09 [27.6] ELECTRICAL HOLE AVAILABLE FOR TOP AIR DISCHARGE OR WATER COOLED UNITS ONLY.
FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO (PLUS OR MINUS 1/16 INCH [1.5mm]).

Weights	lbs.	kgs.
Net	414	187.8
Crated	425	192.8
***For reference only**		
	cu. ft.	**cu. m.**
Volume	35.0	0.99
Dimensions	**in.**	**mm.**
Width	18-1/4	464
Depth	32-1/4	820
Height	34	864

***Designed to rest on a plastic pad directly on the countertop or optional cart**

Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)
208-230/60/1 Air	25	19	2P 3W
208-230/60/3 Air	15	13	3P 4W
208-230/60/3 Water	15	13	3P 4W
220-240/50/1 Air	20	17	2P 3W
380-415/50/3N~ Air	8	7	4P 5W

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.
(For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____

Neutral: ☐Yes ☐No **Cooling**: ☐Air ☐Water ☐NA

Options:_____

Specifications

Electrical
One dedicated electrical connection is required. See the electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord and receptacle specifications as local codes allow.

Beater Motor
One, 1.5 hp.

Refrigeration System
One, 10,100 BTU/hr. R449A.

Air-Cooled
Minimum 6" (152 mm) on both sides. Place the back of the unit against a wall to prevent recirculation of warm air. Minimum air clearances must be met to ensure adequate airflow for optimum performance.
Optional air discharge chute directs heated air exhaust upward.
No clearance required on right side if air discharge chute is used.

Water-Cooled
Water inlet and drain connections out rear panel 3/8" FPT.

Options

- Cone Dispenser
- Hopper Locks
- Legs - increase height of unit by 4-1/4" (108 mm)
- Syrup Rail (front mount requires special cart with rear door)
- Syrup Rail Kit (side mount)
- Top Air Discharge Chute (air-cooled only)
- C201 Cart Standard Height with Casters
- C201 Cart, Standard Height with Casters, Flavor Burst Ready
- C201 Cart, Standard Height with Casters, Rear Door

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor distributor.

Authorized Taylor Distributor

ROCKY MOUNTAINS DISTRIBUTING
2580 S Tejon St, Englewood, CO 80110
303-825-0171
RMDColorado.com

TAYLOR®
750 N. Blackhawk Blvd.
Rockton, Illinois 61072
www.taylor-company.com