TAYLOR®

Item No. _____

C716

Soft Serve Freezer

Twist, Pump, Heat Treatment





Integrated Syrup Rail Option
2 room temperature with lids & ladles, 2 heated with syrup pumps



Simplified Pump

Features

Offers all the popular soft serve variations from low to non-fat ice creams or yogurt. Serve two separate soft serve flavors, or an equal combination of both in a twist.

Heat Treatment System
Provides a daily heating and cooling cycle to safely maintain dairy products up to 28 days before a complete disassembly and cleaning is required.

Freezing Cylinder
Two, 3.4 quart (3.2 liter).

Mix Hopper
Two, 20 quart (18.9 liter). Refrigerated to maintain mix below 41ºF (5ºC) in Auto and Standby modes.

Indicator Lights
Digital readout displays hours since last brush cleaning to ensure product safety. Mix Low light alerts operator to add mix. Audible alarm may be enabled to sound when mix is low. When the Mix Out light flashes, the unit shuts down automatically to prevent damage.

Touch Screen Controls
Microprocessor touch controls are embedded in a durable tempered glass panel. Multiple languages are selectable. Viscosity is continually measured to dispense consistent quality soft serve desserts. Temperatures in the hoppers or freezing cylinders may be displayed at any point of operation, in either Fahrenheit or Celsius. Draw counter allows operator to view number of servings dispensed.

Standby
During long no-use periods, the standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.

Two Locking Casters
Front casters have a locking feature for operators to keep equipment in place. The lock can be released to move the equipment for cleaning.

Door Interlock System
Protects the operator from injury as the beater will not operate without the dispensing door in place.

Freezer Door
A specially designed thermoplastic door allows quick ejection of product with a simple movement of the draw handle. Self-closing draw handles are standard.

Approval Mark Note:
The Approval marks shown below may not apply to every model configuration. Approvals may vary based on Voltage, Model Option and Accessory selection, please contact your local distributor for more information.


750 N. Blackhawk Blvd. Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
info@taylor-company.com

ISO 9001:2015
Registered Firm

NSF Standard 6

c UL us LISTED SA2650

CE Selected 50/60 Hz. Models

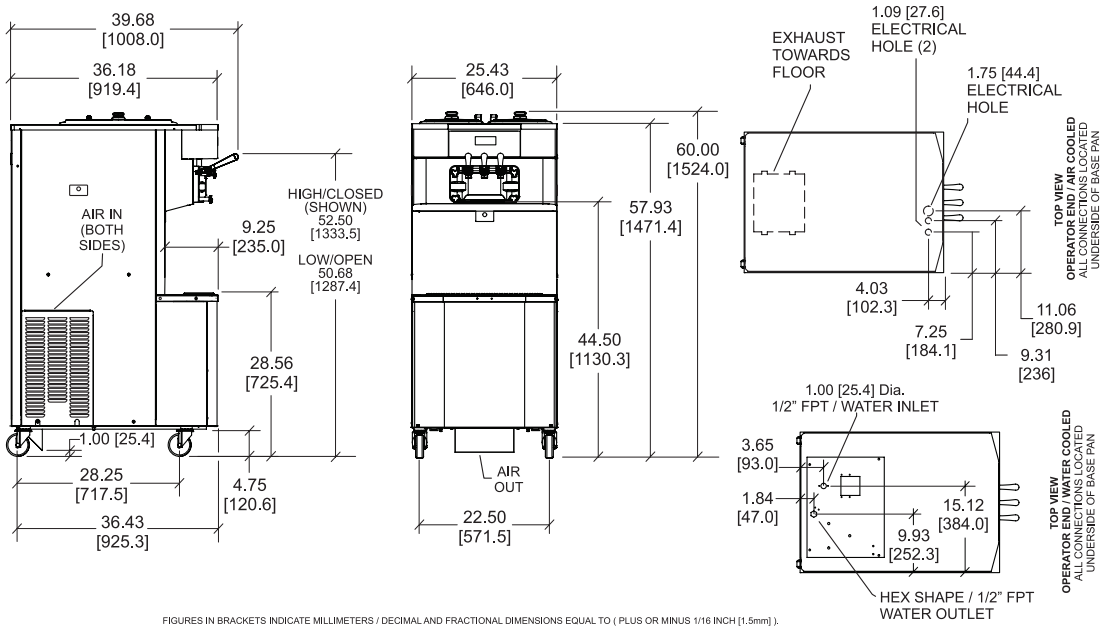

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO (PLUS OR MINUS 1/16 INCH [1.5mm]).

Weights	**lbs.**	**kgs.**
Net	827	375.1
Crated	942	427.3

***For reference only**

	cu. ft.	**cu. m.**
Volume	67.4	1.91

Dimensions	**in.**	**mm.**
Width	25-7/16	646
Depth	36-3/16	919
Height	60	1524
Floor Clearance	4-3/4	121

***Mounted on standard casters.**

Electrical	**Maximum Fuse Size**		**Minimum Circuit Ampacity**		**Poles (P) Wires (W)**
	Left	**Right**	**Left**	**Right**	
208-230/60/1 Air	30	25	23	20	2P 3W
208-230/60/1 Air, Syrup	30	25	25	20	2P 3W
208-230/60/1 Water	25	25	21	20	2P 3W
208-230/60/3 Air	20	15	16	13	3P 4W
208-230/60/3 Air, Syrup	20	15	18	13	3P 4W
208-230/60/3 Water	15	15	14	13	3P 4W
380-415/50/3N~ Air	12	9	11	8	4P 5W
380-415/50/3N~ Water	10	9	8	8	4P 5W
220-380/60/3PH (A/C)	20	20	19	19	3P 4W

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.
(For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz_____ ph _____

Neutral: ❑Yes ❑No **Cooling**: ❑Air ❑Water ❑NA

Options:_____

Specifications

Electrical

Two dedicated electrical connections are required. See the electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord and receptacle specifications as local codes allow.

Beater Motor

Two, 1.5 hp.

Refrigeration System

Two, 9,500 BTU/hr. R449A.
(BTUs may vary depending on compressor used.)

Air-Cooled

Minimum 3" (76 mm) around all sides. Install the deflector provided to prevent recirculation of warm air. Minimum air clearances must be met to ensure adequate air flow for optimum performance.

Water-Cooled

Water inlet and drain connections under side of base 1/2" FPT.

Options

- Cone Dispenser
- Drain Adaptor (for ease of rinsing and cleaning)
- Draw Valve Lock Kit
- Faucet
- Hopper Locks
- Panel Spinner
- Syrup Rail (integrated)
- Syrup Rail Kit (side mount)

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor distributor.

Authorized Taylor Distributor

ROCKY MOUNTAINS DISTRIBUTING
2580 S Tejon St, Englewood, CO 80110
303-825-0171
RMDColorado.com

TAYLOR®
750 N. Blackhawk Blvd.
Rockton, Illinois 61072
www.taylor-company.com